


## LCD PATCH CORD UNIBOOT PUSH-PULL-BOOT OS2

### FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL

The LCD PATCH CORD UNIBOOT PUSH-PULL-BOOT is a type of fiber optic cable that integrates two fibers into a single, round cable with one boot, designed for high-density networking. It saves significant space and simplifies cable management compared to traditional duplex cords.

High-quality LCD connectors provide easy reverse polarity. Push-Pull-Boot allows quick and convenient connect/disconnect patch cord without using tools in high-density environments.

Preferably used for connecting and patching inside or between adjacent racks.

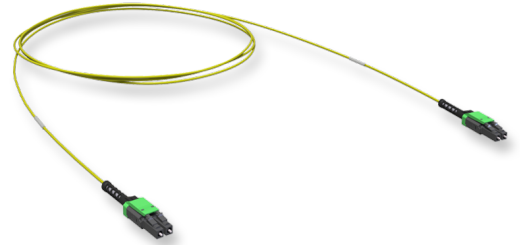

#### SPECIFICATION

SKU	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL
Fiber Type	OS2 9/125 SMF
Connector A	2F LCD APC Push-Pull-Boot
Connector B	2F LCD APC Push-Pull-Boot
Polarity	A/B Stright
Loss Class	Ultra Low Loss
Connector A Insertion Loss	≤ 0,12 dB (typ.); ≤ 0,25 dB (max.)
Connector A Return Loss	≥ 60 dB
Connector B Insertion Loss	≤ 0,12 dB (typ.); ≤ 0,25 dB (max.)
Connector B Return Loss	≥ 60 dB
Cable Structure	Slim Duplex
Cable Attenuation	≤ 0,32 dB/km @1310 nm; ≤ 0,18 db/km @1550 nm
Cable Jacket	LSZH
Min. Bend Radius	20/10D (Dynamic/Static)
Tensile Strength	Cable: 100 N (Installation); 50 N (In Service)
Operating Temperature	-10 to 50°C
Storage Temperature	-20 to 60°C

#### Part Numbers

B422BBS0001	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 1 m
B422BBS01.5	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 1.5 m
B422BBS0002	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 2 m
B422BBS02.5	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 2.5 m
B422BBS0003	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 3 m
B422BBS0004	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 4 m
B422BBS0005	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 5 m
B422BBS0006	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 6 m
B422BBS0007	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 7 m

**Part Numbers (continue)**

<b>B422BBS0010</b>	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 10 m
<b>B422BBS0015</b>	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 15 m
<b>B422BBS0020</b>	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 20 m
<b>B422BBS0025</b>	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 25 m
<b>B422BBS0030</b>	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 30 m
<b>B422BBS0035</b>	FO Patch Cord LC-APC/LC-APC Duplex Uniboot, Push-Pull-Boot, 09/125 OS2, type S, LSZH, ULL, 35 m